



Hisense Sero 7 Pro Battery Replacement

This guide will inform the user on the steps of replacing the battery on the Hisense Sero 7 Pro.

Written By: Baochau Nguyen





TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-


Step 1 — Battery




 Turn tablet off before disassembling it.

 Use caution when handling device if screen is cracked.

- Using a plastic opening tool, pry open the back cover from the tablet.



 An extra set of hands may be required.

Step 2

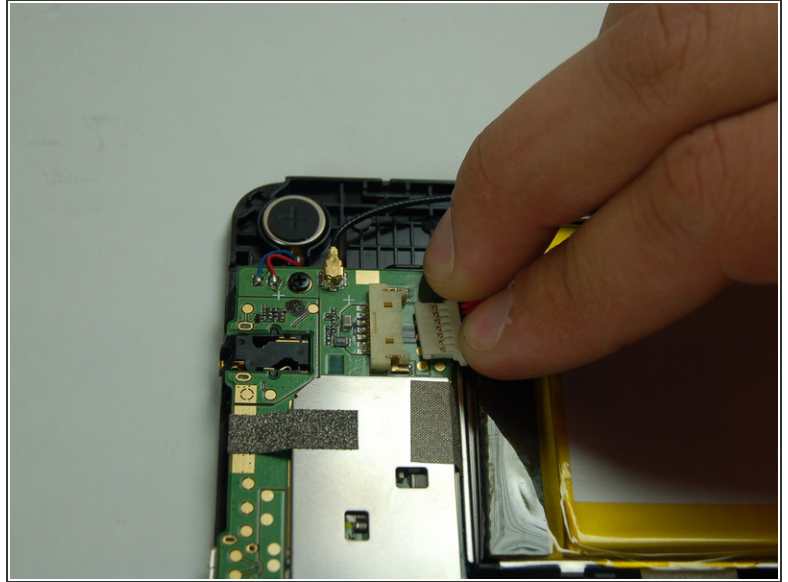

- i** Connected to the battery are wires attached to a port. This port is inserted into a memory chip of the tablet.
- Pull out the port from the memory chip. Tweezers may be required.

Step 3

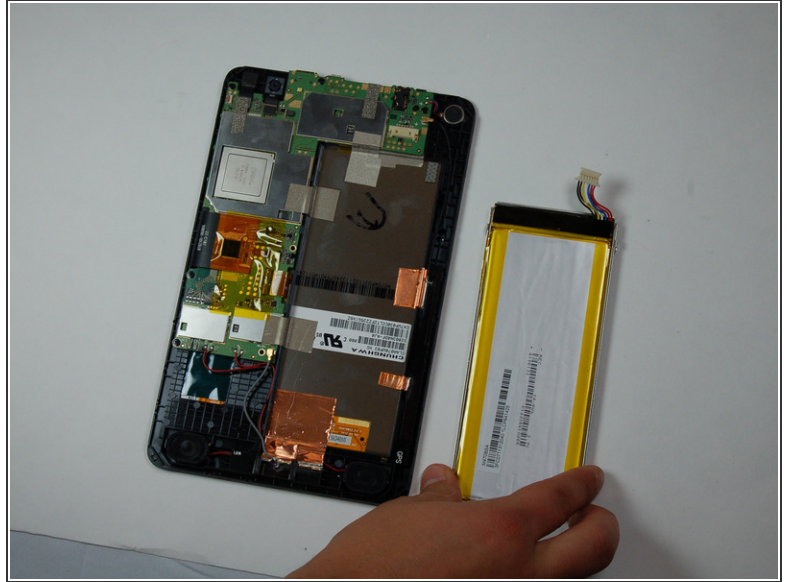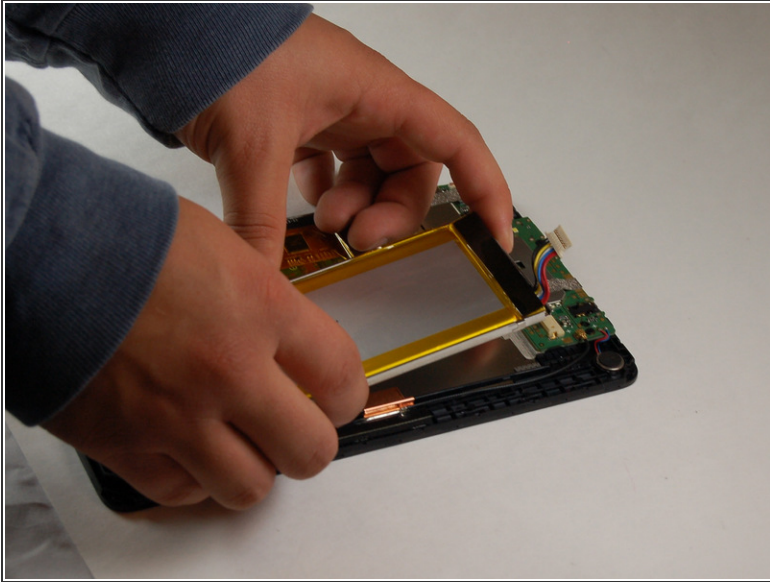

- Using a plastic opening tool, carefully place under one corner of the battery.
- Move around edges of the battery to lift it off of the tablet.
- Remove battery from tablet.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-15 05:48:39 PM.